









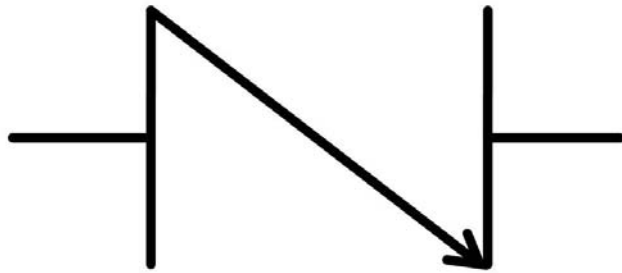




4. Check and Foot Valves








4. Check and Foot Valves

Product name	Description	L x H (mm)	Δ P. Bar max	T min/max °C	Material	Dn	Art.no. ITS	Picture
ITS 623	Check Valve Type Lift Straight PN 16 Body, bonnet: cast iron Disc, seat, spindle: stainless steel 304 Cover seal: graphite	150 x 56	16	≤225°C	GG25	20	327651	
		160 x 67	16	≤225°C		25	327652	
		180 x 76	16	≤225°C		32	327653	
		200 x 89	16	≤225°C		40	327654	
		230 x 96	16	≤225°C		50	327655	
		290 x 104	16	≤225°C		65	327656	
		310 x 124	16	≤225°C		80	327657	
		350 x 161	16	≤225°C		100	327658	
		400 x 174	16	≤225°C		125	327659	
		480 x 197	16	≤225°C		150	327660	
ITS 623H	Check Valve Type Lift Angle PN 16	125 x 73	16	≤225°C	GG25	50	327725	  Fig. 101 Fig. 102 Picture used from Econosto
ITS 497 *	Check Valve Body, bonnet, disc: bronze Seal: graphite	140 x 75	16	≤200°C	Bronze RG5	25	327943	
		150 x 75	16	≤200°C		32	327944	
		155 x 95	16	≤200°C		40	327945	
		180 x 105	16	≤200°C		50	327946	
		200 x 120	16	≤200°C		65	327947	
		240 x 130	16	≤200°C		80	327948	
		270 x 160	16	≤200°C		100	327949	
ITS 508F	Ball Check Valve Threadconnection. Type specifications on request	121 x 75	10	10°C tot 70°C	GG25	1"	327811	 
		141 x 85	10	10°C tot 70°C		1 1/4"	327812	
		150 x 90	10	10°C tot 70°C		1 1/2"	327813	
		175 x 115	10	10°C tot 70°C		2"	327814	
		210 x 135	10	10°C tot 70°C		2 1/2"	327815	
ITS 408F	Ball Check Valve Flanged Type specifications on request	180 x 90	10	10°C tot 70°C	GG25	40	327819	 
		200 x 115	10	10°C tot 70°C		50	327820	
		240 x 135	10	10°C tot 70°C		65	327821	
		260 x 160	10	10°C tot 70°C		80	327822	
		300 x 190	10	10°C tot 70°C		100	327823	
		350 x 222	10	10°C tot 70°C		125	327824	








4. Check and Foot Valves

Product name	Description	L x H (mm)	Δ P. Bar max	T min/max °C	Material	Dn	Art.no. ITS	Picture
ITS / 40G	Check Valve	70 x 57,5	16	≤100°C	GY	25	327953	 70GY
		75 x 70	16	≤100°C		32	327954	
		80 x 75	16	≤100°C		40	327955	
		85 x 82,5	16	≤100°C		50	327956	
		105 x 92,5	16	≤100°C		65	327957	
		125 x 100	16	≤100°C		80	327958	
		145 x 110	16	≤100°C		100	327960	
		170 x 125	16	≤100°C		125	327961	
200 x 142,5	16	≤100°C	150	327962				
ITS/ 40NGY	Check Valve	70 x 57,5	16	≤100°C	NGY	25	327965	No picture
		75 x 70	16	≤100°C		32	327966	
		80 x 75	16	≤100°C		40	327967	
		85 x 82,5	16	≤100°C		50	327968	
		105 x 92,5	16	≤100°C		65	327969	
		125 x 100	16	≤100°C		80	327970	
		145 x 110	16	≤100°C		100	327971	
		170 x 125	16	≤100°C		125	327972	
200 x 142,5	16	≤100°C	150	327973				
ITS/ 70ZV *	Check Valve Body: zinc-free bronze Disc: zinc-free bronze Seat en seal: NBR	70 x 57,5	16	≤100°C	ZVBR	25	327981	 70ZV
		75 x 70	16	≤100°C		32	327982	
		80 x 75	16	≤100°C		40	327983	
		85 x 82,5	16	≤100°C		50	327984	
		105 x 92,5	16	≤100°C		65	327985	
		125 x 100	16	≤100°C		80	327986	
		145 x 110	16	≤100°C		100	327987	
		170 x 125	16	≤100°C		125	327988	
200 x 142,5	16	≤100°C	150	327989				








4. Check and Foot Valves

Product name	Description	L x H (mm)	Δ P. Bar max	T min/max °C	Material	Dn	Art.no. ITS	Picture
ITS 726BR	Foot Valve With Strainer Basket Body, disc, basket: brass ball: stainless steel Seal: rubber					1/2"	327763	
						3/4"	327764	
						1"	327765	
						1 1/4"	327766	
						1 1/2"	327767	
						2"	327768	
						2 1/2"	327769	
						3"	327770	
ITS 613BR	Check Valve	L = 55	16	-	Bronze	3/4"	327995	
ITS 291NF	Check Valve Delrin, GU, BSP Body: brass Seal: NBR of EPDM Spring: stainless steel	65 x 23	10	≤80°C	Brass	1/2"	327543	
		75 x 28	10	≤80°C		3/4"	327544	
		90 x 28	10	≤80°C		1"	327545	
		110 x 36	10	≤80°C		1 1/4"	327546	
		120 x 38	10	≤80°C		1 1/2"	327547	
		150 x 46	10	≤80°C		2"	327548	
ITS 2634 *	DIN Check Valve Wafertype Stainless steel or forged steel	17 x 21,5	40	-10°Ctot 400°C	Stainless Steel	15	335115	
		20 x 26,5	40	-10°Ctot 400°C		20	335116	
		23 x 32	40	-10°Ctot 400°C		25	335117	
		28 x 38	40	-10°Ctot 400°C		32	335118	
		31,5 x 43	40	-10°Ctot 400°C		40	335119	
		40 x 48	40	-10°Ctot 400°C	ST / Stainless St	50	335120	
		46 x 58	40	-10°Ctot 400°C	ST / Stainless St	65	335121	
		51 x 66	40	-10°Ctot 400°C	ST / Stainless St	80	335122	
		61 x 76	40	-10°Ctot 400°C	ST / Stainless St	100	335123	








4. Check and Foot Valves

Product name	Description	L x H (mm)	Δ P. Bar max	T min/max °C	Material	Dn	Art.no. ITS	Picture
ITS 505TE *	Check Valve Bronze / Hinged Valve Teflon seat / disc	50 x 35	16	≤200°C	Bronze / Teflon	3/8"	348040	
		60 x 38	16	≤200°C		1/2"	348041	
		70 x 49	16	≤200°C		3/4"	348042	
		80 x 54	16	≤200°C		1"	348043	
		95 x 60	16	≤200°C		1 1/4"	348044	
		105 x 70	16	≤200°C		1 1/2"	348045	
		130 x 77	16	≤200°C		2"	348046	
		160 x 94	16	≤200°C		2 1/2"	348047	
ITS 505 BR *	Check Valve Bronze / Hinged Valve Bronze disc / seat	50 x 35	16	≤200°C	Bronze	3/8"	350135	
		60 x 38	16	≤200°C		1/2"	350136	
		70 x 49	16	≤200°C		3/4"	350137	
		80 x 54	16	≤200°C		1"	350138	
		95 x 60	16	≤200°C		1 1/4"	350139	
		105 x 70	16	≤200°C		1 1/2"	350140	
		130 x 77	16	≤200°C		2"	350141	
		160 x 94	16	≤200°C		2 1/2"	350142	
ITS 615TLV	Check Valve Disc: stainless steel	L = 55	10	-	Bronze	1/2"	328023	
		L = 60	10	-		3/4"	328024	
		L = 70	10	-		1"	328025	
		L = 80	10	-		1 1/4"	328026	
		L = 85	10	-		1 1/2"	328037	
ITS 76N 3/8" BSP *	Check Valve Bronze Body: bronze Guard and bonnet: brass Disc: stainless steel	65 x 28	21	≤150°C	Bronze RG5	3/8"	334280	
		65 x 28	21	≤150°C		1/2"	334281	
		75 x 39	21	≤150°C		3/4"	334282	
		90 x 42	21	≤150°C		1"	334283	
		105 x 45	21	≤150°C		1 1/4"	334284	
		120 x 56	21	≤150°C		1 1/2"	334285	
		145 x 67	21	≤150°C		2"	334286	
		-	-	-		2 1/2"	334287	
		-	-	-		3"	334288	





4. Check and Foot Valves

Product name	Description	L1 x H1 (mm)	ΔP . Bar max	T min/max °C	Material	Dn	Art.no. ITS	Picture
ITS 102 *	Check Valve Type Lift Angle PN 16	115 x 70	16	$\leq 225^\circ\text{C}$	GG25	40	366640	 Fig. 101 Fig. 102
		125 x 73	16	$\leq 225^\circ\text{C}$		50	366641	
ITS 1440 *	Check Valve Delrin, GU, BSP Body: brass Seal: rubber Disc: plastic	65 x 29	16	$\leq 75^\circ\text{C}$	Brass	1/2"	366650	
		75 x 32	16	$\leq 75^\circ\text{C}$		3/4"	366651	
		93 x 35	16	$\leq 75^\circ\text{C}$		1"	366652	
		110 x 43	16	$\leq 75^\circ\text{C}$		1 1/4"	366653	
		120 x 47	16	$\leq 75^\circ\text{C}$		1 1/2"	366654	
		150 x 55	16	$\leq 75^\circ\text{C}$		2"	366655	
ITS 83BR *	Check Valve Hinged Valve, Flanged Body, bonnet, hinge arm: cast iron Seat: bronze Hinge pin: brass Disc Dn 40-125: bronze Disc Dn 150-300: cast iron Disc seal: bronze Packing: novus 34	180 x 115	16	$\leq 120^\circ\text{C}$	GG25 / Bronze	40	366680	
		200 x 125	16	$\leq 120^\circ\text{C}$		50	366681	
		240 x 130	16	$\leq 120^\circ\text{C}$		65	366682	
		260 x 140	16	$\leq 120^\circ\text{C}$		80	366683	
		300 x 160	16	$\leq 120^\circ\text{C}$		100	366684	
		350 x 180	16	$\leq 120^\circ\text{C}$		125	366685	
		400 x 200	16	$\leq 120^\circ\text{C}$		150	366686	
		500 x 220	16	$\leq 120^\circ\text{C}$		200	366687	
		600 x 290	16	$\leq 120^\circ\text{C}$		250	366688	
		700 x 330	16	$\leq 120^\circ\text{C}$		300	366689	
ITS 1441 *	Check Valve Low-noise, Flanged Body: cast iron Disc Dn 40-50: bronze Disc Dn 65-250: stainless steel	180 x 75	16	$\leq 90^\circ\text{C}$	Cast Iron	40	366780	
		200 x 82,5	16	$\leq 90^\circ\text{C}$		50	366781	
		240 x 92,5	16	$\leq 90^\circ\text{C}$		65	366782	
		260 x 100	16	$\leq 90^\circ\text{C}$		80	366783	
		300 x 110	16	$\leq 90^\circ\text{C}$		100	366784	
		350 x 125	16	$\leq 90^\circ\text{C}$		125	366785	
		400 x 142,5	16	$\leq 90^\circ\text{C}$		150	366786	
		500 x 170	16	$\leq 90^\circ\text{C}$		200	366787	
		600 x 202,5	16	$\leq 90^\circ\text{C}$		250	366788	
		700 x 230	16	$\leq 90^\circ\text{C}$		300	366789	






4. Check and Foot Valves

Product name	Description	L1 x H1 (mm)	ΔP . Bar max	T min/max °C	Material	Dn	Art.no. ITS	Picture	
ITS 836M DR	Ball Check Valve Threadconnection(Overflow Safety)					1"	.366920	 By Eriks 	
	Floating ball					1 1/4"	.366921		
						1 1/2"	.366922		
						2"	.366923		
						2 1/2"	.366924		
ITS 836M FL	Ball Check Valve Flanged (Overflow Safety)								
	Floating ball					40	.366926		
						50	.366927		
						65	.366928		
						80	.366929		
						100	.366930		
						125	.366931		
						150	.366932		





4. Check and Foot Valves

Product name	Description	L1 x H1 (mm)	ΔP . Bar max	T min/max °C	Material	Dn	Art.no. ITS	Picture	
ITS 2630 DR*	Ball Check Valve threadconnection(Overflow Safety)					1"	.366935	 By Econosto 	
	Floating ball					1 1/4"	.366936		
						1 1/2"	.366937		
						2"	.366938		
						2 1/2"	.366939		
ITS 2630 FL*	Ball Check Valve Flanged (Overflow Safety)								
	Floating ball					40	.366941		
						50	.366942		
						65	.366943		
						80	.366944		
						100	.366945		
						125	.366946		
						150	.366947		





4. Check and Foot Valves

Product name	Description	L1 x H1 (mm)	Δ P. Bar max	T min/max °C	Material	Dn	Art.no. ITS	Picture
ITS 97*	Trg.sl. Valve Stainless Steel Springreturn PN16/40				Stainless Steel	15	.370230	
						20	.370231	
						25	.370232	
						32	.370233	
						40	.370234	
						50	.370235	
						65	.370236	
						80	.370237	
						100	.370238	
						125	.370239	
						150	.370240	
						200	.370241	





4. Check and Foot Valves

Product name	Description	L1 x H1 (mm)	Δ P. Bar max	T min/max °C	Material	Dn	Art.no. ITS	Picture
ITS 496*	Bronzen Check Valve				Stainless Steel	15	.370270	
						20	.370271	
						25	.370272	
						32	.370273	
						40	.370274	
						50	.370275	
						65	.370276	
						80	.370277	
						100	.370278	
						125	.370279	
						150	.370280	





4. Check and Foot Valves

Product name	Description	L1 x H1 (mm)	ΔP . Bar max	T min/max °C	Material	Dn	Art.no. ITS	Picture
ITS 3256*	Stainless Steel Check Valve Springreturn				Stainless Steel	1/2"	.370285	
						3/4"	.370286	
						1"	.370287	
						1 1/4"	.370288	
						1 1/2"	.370289	
						2"	.370290	




4. Check and Foot Valves

Product name	Description	L1 x H1 (mm)	ΔP . Bar max	T min/max °C	Material	Dn	Art.no. ITS	Picture
ITS 3250*	Check Valve Stainless Steel BSP bi.dr.				Stainless Steel	1/4"	.370335	 
						3/8"	.370336	
						1/2"	.370337	
						3/4"	.370338	
						1"	.370339	
						1 1/4"	.370340	
						1 1/2"	.370341	
						2"	.370342	



4. Check and Foot Valves

Product name	Description	L1 x H1 (mm)	ΔP . Bar max	T min/max °C	Material	Dn	Art.no. ITS	Picture
ITS / Wiko 2000 1B	Air pipe head				ALU	50	.370390	
						65	.370391	
						80	.370392	
						100	.370393	