






12. Several-other-accessories



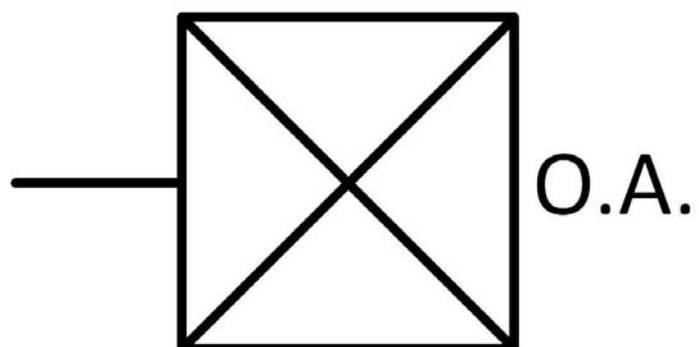







12. Several other accessories

Product name	Description	L X H (mm)	Δ P. Bar max	T min/max °C	Material	Dn	Art.no. ITS	Picture	
ITS Wiko 5000 1A	Non return "Gooseneck" Available till Dn 400 Against extra costs (€20.-) a bugscreen will be added. (type 1B)	H = 160	-	-	Aluminium	50	328280		
		H = 195	-	-		65			
		H = 195	-	-		80			
		H = 225	-	-		100			
		H = 225	-	-		125			
ITS 268 ZS *	Globe Valve GY BR ZS PN16 GEB Body, bonnet: cast iron Bonnet, disc, seat: bronze Spindle: brass Gland packing: asbestos free Available till Dn 100	150 x 189	13	≤ 200°C	Cast Iron	20	327830		
		160 x 203	13	≤ 200°C		25	327831		
		180 x 203	13	≤ 200°C		32	327832		
		200 x 246	13	≤ 200°C		40	327833		
		230 x 254	13	≤ 200°C		50	327834		
		290 x 278	13	≤ 200°C		65	327835		
ITS 574 VS *	Self Closing Drain Valve Push Button PN25 GEB				Steel	20	327679		
ITS 574 GS R *	Self Closing Drain Valve R / SL PN25 GEB					20	327680		
ITS 573	Self Closing Drain Valve Push Button PN25 GEB				Bronze	3/4"	328673		
	Several types available on request								
	ITS 573: Econ 573 not available								
ITS 724 Econ	Peilpijpkraan ZS Br Br Bi + ventilator Body, plunger, bonnet, lever, cap: bronze Seal, o-ring: NBR	70 x 115	2,5	-	Bronze	1 1/2"	327635		
		70 x 118	2,5	-		2"	327636		
ITS 1590 FG *	Level gauge GEW. FL 115 mm Cap, spindle: stainless steel Glass: borosilicate	-	10	90°C	Stainless Steel	20	327751		







12. Several other accessories

Product name	Description	L x H (mm)	ΔP . Bar max	T min/max °C	Material	Dn	Art.no. ITS	Picture
ITS 1723 GY	Sightglass Borosilicateglass Several types available on request	H = 160	16	≤ 280°C	Cast Iron	25	327623	
		H = 180	16	≤ 280°C		32	327624	
		H = 200	16	≤ 280°C		40	327624	
		H = 130	16	≤ 280°C		50	327625	
		H = 290	16	≤ 280°C		65	327626	
		H = 310	16	≤ 280°C		80	327627	
		H = 350	16	≤ 280°C		100	327628	
		H = 400	16	≤ 280°C		125	327629	
		H = 480	16	≤ 280°C		150	327630	
		H = 600	16	≤ 280°C		200	327631	
-	-	-	-	250	327632			
ITS 53 KPL	Plugvalve 3-Way L Gate Body: cast iron	230 x 176	10	90°C	Bronze	50	327733	
		290 x 215	10	90°C		65	327734	
ITS 53 KPT	Plugvalve 3-Way T Gate Plug: bronze	230 x 176	10	90°C	Cast Iron	50	327735	
		290 x 215	10	90°C		65	327736	
ITS 731 *	Plugvalve Body, plug: brass Grip: bronze	-	16	40°C	Bronze	3/4"	328085	
		-	16	40°C		1"	328086	
ITS Winel T2000	Flame Arrester type 2000 Bigger measurements on request Several types available on request				Bronze	25	349100	
						32	349101	
						40	349102	
						50	349103	
						65	349104	
						80	349105	
						100	349106	
						125	349107	
						150	349108	
						200	349109	







12. Several other accessories

Product name	Description	L x H (mm)	Δ P. Bar max	T min/max °C	Material	Dn	Art.no. ITS	Picture
ITS ERV Yellow	Compensator ERV Yellow Several types available on request					25	349120	
						32	349121	
						40	349122	
						50	349123	
						65	349124	
						80	349125	
						100	349126	
						125	349127	
						150	349128	
						200	349129	
						250	349130	
ITS Airvent 36A	Aerator Watts 36A Several types available on request				Brass	1/4"	349140	
						3/8"	349141	
						1/2"	349142	
						3/4"	349143	
						1"	349144	
						1 1/4"	349145	
						1 1/2"	349146	
						2"	349147	
ITS 8150 *	Flowmeter 8150 FM 26-332-112 Several types available on request				Stainless Steel	1/4"	329300	
						1/2"	329301	
						3/4"	329302	
						1 1/4"	329303	







12. Several other accessories

Product name	Description	L x H (mm)	Δ P. Bar max	T min/max °C	Material	Dn	Art.no. ITS	Picture	
ITS Hydro-R	STRANG Valve BR BSP N Several types available on request					1 1/2"	327810	 2611	
						1 1/4"	327809		
ITS 2620 *	Strang Valve Flange GY Body, head piece: cast iron Spindle, measuring nipple: brass Disc: bronze Disc seal: PTFE Handwheelcap: black plastic	150 x 118	16	150°C		25	328700		
		160 x 118	16	150°C		32	328701		
		180 x 136	16	150°C		40	328702		
		230 x 145	16	150°C		50	328703		
		290 x 188	16	150°C		65	328704		
		310 x 203	16	150°C		80	328705		
ITS 950.0 *	Hand Pump BSP Internal Thread Several types available on request	20 L/min			GG25	1/2"	351145		
ITS 950.1 *		30 L/min				3/4"	351146		
ITS 950.2 *		40 L/min				1"	351147		
ITS 950.3 *		50 L/min				1 1/4"	351148		
ITS 950.4 *		70 L/min				1 1/4"	351149		
ITS 950.5 *		90 L/min				1 1/2"	351150		
ITS 950.7 *		140 L/min				2"	351151		
ITS A0-GGMS-GH	Hand Pump BSP Internal Thread Allweiler Several types available on request	20 L/min			GG25	1/2"	350200		
		30 L/min				3/4"	350201		
		40 L/min				1"	350202		
		50 L/min				1 1/4"	350203		
		70 L/min				1 1/4"	350204		
		90 L/min				1 1/2"	350205		
		140 L/min				2"	350206		






12. Several other accessories

Product name	Description	L x H (mm)	Δ P. Bar max	T min/max °C	Material	Dn	Art.no. ITS	Picture
ITS 141GY *	Pressure Reduce Valve Body, springcap: cast iron Disc: brass ≤ Dn 150, steel Dn200 Discring: NBR Seat: bronze Diaphragm: EPDM Spring: steel	-	-	-	Cast Iron	25	328617	
		-	-	-		32	328618	
		-	-	-		40	328619	
		230 x 388	16	70°C		50	328620	
		290 x 441	16	70°C		65	328621	
		310 x 510	16	70°C		80	328622	
		350 x 601	16	70°C		100	328623	
		400 x 697	16	70°C		125	328624	
		480 x 821	16	70°C		150	328625	
600 x 1505	16	70°C	200	328626				
ITS 141 B Econ	Pressure Reduce Valve Body: bronze Springcap: brass Diaphragm, discring: NBR Basket: stainless steel	130 x 154,5	25	70°C	Bronze	15	328005	
		150 x 154,5	25	70°C		20	328006	
		160 x 217,5	25	70°C		25	328007	
		180 x 217,5	25	70°C		32	328008	
		200 x 286,5	25	70°C		40	328009	
ITS / midi 15C	Pressure Reduce Valve Atlas Copco	-				1/2"	380300	
ITS 31242 / *	Persluchtappendage Several types available on request Several types available	-		0°C tot 50°C	Aluminium	3/4"	334290	
		-				1"	334291	
		-				1 1/4"	334292	
		-				1 1/2"	334293	
ITS 31240 / *	Filter With Drain Several types available on request	-		0°C tot 50°C	Aluminium	3/4"	334295	No picture
						1"	334296	
						1 1/4"	334297	
						1 1/2"	334298	







12. Several other accessories

Product name	Description	L x H (mm)	Δ P. Bar max	T min/max °C	Material	Dn	Art.no. ITS	Picture	
ITS 143 / Econ	Pressure Reduce Valve 1,5 - 6 bar 2x BSP Male Body en couplings: brass Springcap, button, disc, seat: plastic Diaphragm, seal: NBR Basket, stainless steel	140 x 147	25	70°C	Brass	1/2"	334500		
		160 x 147	25	70°C		3/4"	334501		
		180 x 175	25	70°C		1"	334502		
		200 x 229	25	70°C		1 1/4"	334503		
		225 x 299	25	70°C		1 1/2"	334504		
		255 x 299	25	70°C		2	334505		
ITS- BRC125 F05/F07	Actuation, Hydraulic On request: eindschakelaars positiesignaal 4-20mA, onderdompelbare versie LPU (elektro-Hydraulic unit)	96 x 129	210	-20° tot 80°C	-		366220	 Double-acting BRC	
ITS- BRC250 F07/F10		118 x 151,5	210	-20° tot 80°C			366221		
ITS- BRC500 F10/F12		132 x 176	210	-20° tot 80°C			366222		
ITS- BRC1000 F12		160 x 201	210	-20° tot 80°C			366223		
ITS- BRC2000 F12		192 x 234	210	-20° tot 80°C			366224		
ITS- BRC2000 F14		192 x 234	210	-20° tot 80°C			366225		
ITS- BRC4000 F14		300 x 279	210	-20° tot 80°C			366227		
ITS- BRC4000 F16		300 x 279	210	-20° tot 80°C			366228		
ITS- BRC052 F25		295 x 421	210	-20° tot 80°C			366229		
ITS- BRC072 F30		334 x 421	210	-20° tot 80°C			366230		
ITS- BRCF125 F05		Actuation, Hydraulic On request: eindschakelaars positiesignaal 4-20mA, onderdompelbare versie LPU (elektro-Hydraulic unit)	96 x 215	135	-20° tot 80°C	-			366235
ITS- BRCF250 F05/F07	118 x 256		135	-20° tot 80°C			366236		
ITS- BRCF500 F07	132 x 306		135	-20° tot 80°C			366237		
ITS- BRCF1000 F10	160 x 360		135	-20° tot 80°C			366238		
ITS- BRCF2000 F10	192 x 426		135	-20° tot 80°C			366239		
ITS- BRCF2000 F12	192 x 426		135	-20° tot 80°C			366240		
ITS- BRC4000 F12	300 x 550		135	-20° tot 80°C			366241		
ITS- BRCF4000 F14	300 x 550		135	-20° tot 80°C			366242		
ITS- BRCF052 F14	410 x 725		135	-20° tot 80°C			366243		
ITS- BRCF052 F16	410 x 725		135	-20° tot 80°C			366244		
ITS- BRC072 F25	440 x 944		135	-20° tot 80°C			366245		
ITS / BRC(F) Hand pump	SOS Hand Pump		-	-				366250	







12. Several other accessories

Product name	Description	L x H (mm)	ΔP . Bar max	T min/max °C	Material	Dn	Art.no. ITS	Picture
ITS 2622 *	Strang Valve Flange GY Body, head piece: cast iron Spindle, measure nipple: brass Disc: bronze Disc seal: PTFE Handwheelcap: black plastic	150 x 118	16	150°C	Cast Iron	65	366260	
		160 x 118	16	150°C		80	366261	
		180 x 136	16	150°C		100	366262	
		230 x 145	16	150°C		125	366263	
		290 x 188	16	150°C		150	366264	
		310 x 203	16	150°C		200	366265	
		730 x 480	16	150°C		250	366266	
		850 x 515	16	150°C		300	366267	
ITS ERV Yellow + Vacuumring	Compensator ERV Yellow + V-ring					25	366385	
						32	366386	
						40	366387	
						50	366388	
						65	366389	
						80	366390	
						100	366391	
						125	366392	
						150	366393	
						200	366394	
				250	366395			
ITS 3882B *	Sightglass Borosilicateglass Several types available on request	H = 160	16	$\leq 280^\circ\text{C}$	Cast Iron	25	366410	
		H = 180	16	$\leq 280^\circ\text{C}$		32	366411	
		H = 200	16	$\leq 280^\circ\text{C}$		40	366412	
		H = 130	16	$\leq 280^\circ\text{C}$		50	366413	
		H = 290	16	$\leq 280^\circ\text{C}$		65	366414	
		H = 310	16	$\leq 280^\circ\text{C}$		80	366415	
		H = 350	16	$\leq 280^\circ\text{C}$		100	366416	
		H = 400	16	$\leq 280^\circ\text{C}$		125	366417	
		H = 480	16	$\leq 280^\circ\text{C}$		150	366418	
		H = 600	16	$\leq 280^\circ\text{C}$		200	366419	
		-	-	-		-	250	



12. Several other accessories

Product name	Description	L x H (mm)	Δ P. Bar max	T min/max °C	Material	Dn	Art.no. ITS	Picture
ITS 1753 ST Boro	Sightglass Borosilicateglass Several types available on request	H = 160	16	$\leq 280^{\circ}\text{C}$	Cast Iron	25	366445	 Equivalent for ECON 3882B
		H = 180	16	$\leq 280^{\circ}\text{C}$		32	366446	
		H = 200	16	$\leq 280^{\circ}\text{C}$		40	366447	
		H = 130	16	$\leq 280^{\circ}\text{C}$		50	366448	
		H = 290	16	$\leq 280^{\circ}\text{C}$		65	366449	
		H = 310	16	$\leq 280^{\circ}\text{C}$		80	366450	
		H = 350	16	$\leq 280^{\circ}\text{C}$		100	366451	
		H = 400	16	$\leq 280^{\circ}\text{C}$		125	366452	
		H = 480	16	$\leq 280^{\circ}\text{C}$		150	366453	
		H = 600	16	$\leq 280^{\circ}\text{C}$		200	366454	
-	-	-	-	-	250	366455		
ITS BA BM 015-020	Backflow Preventer Complete Body: brass Relieve valve: plastic PA First and secon check valve module: plastic POM Seal: rubber	201 x 168,5	10	65°C	Brass	15	366460	
ITS BA BM 020-025		201 x 168,5	10	65°C		20	366461	
ITS BA BM 025-032		252 x 238	10	65°C		25	366462	
ITS BA BM 032-040		252 x 238	10	65°C		32	366463	
ITS BA BM 040-050		336 x 303,5	10	65°C		40	366464	
		336 x 303,5	10	65°C		50	366465	
		-	10	65°C			366466	
		-	10	65°C			366467	
		-	10	65°C			366468	
		-	10	65°C			366469	
	-	10	65°C		366470			
	-	10	65°C		366471			
ITS 53 KPL / KPT *	Plugvalve 3-Way L Gate	230 x 176	10	90°C	Bronze	50	366670	 Fig. 53KPT  Fig. 58
		290 x 215	10	90°C		65	366671	
	Plugvalve 3-way T gate	230 x 176	10	90°C	Cast Iron	50	366672	
		290 x 215	10	90°C		65	366673	